


## Dante™ 4x4 Audio Interface



Dante™ PoE

Reference	CV440DP
Input connectors	detachable connectors
Output connectors	detachable connectors
Input impedance	> 1,8 kohms
Maximum inout level	+8 dBu
Output impedance	200 ohms
Maximum output level	+ 20 dBu
Frequency response	20 Hz - 20 kHz (+/- 1 dB)
THD+N	< 0,02%
Power supply	PoE 802.3 af ou 12 V
Power consumption	10 W max
Dimensions (H x W x D)	52 x 81 x 121 mm
Weight	357 g (excluding accessories)

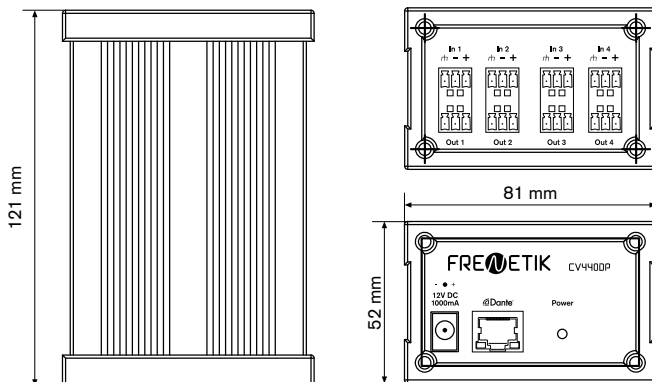

## Accessorie Fastening bracket

CV440DP/F

